מדינת ישראל

**STATE OF ISRAEL**

**Ministry of Justice**
Patent Office

משרד המשפטים
לשכת הפטנטים

CERTIFIED COPY OF PRIORITY DOCUMENT

This is to certify that
annexed hereto is a true
copy of the documents as
originally deposited with
the patent application
of which particulars are
specified on the first page
of the annex.

זאת לתעודה כי
רצופים בזה העתקים
נכונים של המסמכים
שהופקדו לכתחילה
עם הבקשה לפטנט
לפי הפרטים הרשומים
בעמוד הראשון של
הנספח.

This היום 2 0 -07- 2003
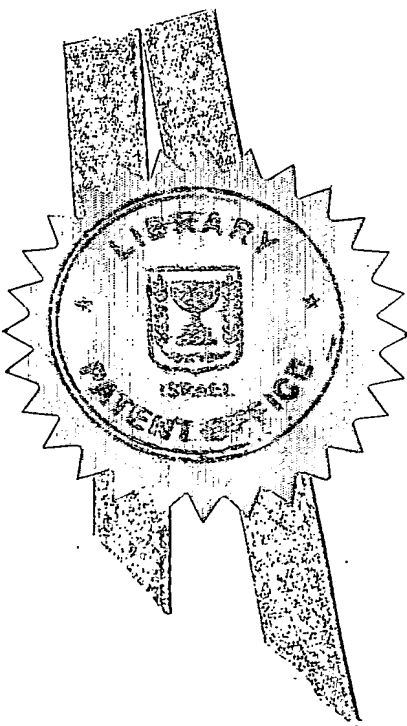
לפי .23
על ובוחנים

רשם הפטנטים

Commissioner of Patents

נתאשר
Certified

חוק הפטנטים, התשכ"ז-1967
PATENTS LAW, 5725-1967

ב ק ש ה   ל פ ט נ ט
Application for Patent

אני (שם המבקש, מענו - ולגבי גוף מאוגד - מקום התאגדותו)
I (Name and address of applicant, and, in case of a body corporate, place of incorporation)
ביוסקאן טכנולוגיות בע"מ, ת.ד. 281 יקנעם, 20692

BIOSCAN Technologies Ltd. P.O.Box 281, Yokneam 20692, Israel

בעל המצאה מכח הדין

ששמה הוא : _____
Owner, by virtue of the Law   of an invention, the title of which is:

מערכת ושיטה לקביעת תכונות חלל צינורי   (בעברית)
(Hebrew)

SYSTEM AND METHOD FOR DETERMINING PROPERTIES OF A TABULAR CAVITY   (באנגלית)
(English)

הממציא/ים : ד"ר פלורין קוטר, רח' בעל שם טוב 9 א', חיפה 33724
The Inventor/s: COTER Florin Ph.D, 9a' Baal Shem Tov str. Haifa 33742, Israel

Hereby apply for a patent to be granted to me in respect thereof   מבקש בזאת כי ינתן לי עליה פטנט.

*בקשת חלוקה Application for Division	*בקשת פטנט מוסף- Application for Patent of Addition	*דרישת דין קדימה Priotiry Claim		
מבקשת פטנט from Application No. מס׳ Dated מיום	*לבקשה/לפטנט to Patent/Appl. No. מס׳ Dated מיום	מספר/סימן Number/Mark	תאריך Date	מדינת האיגוד Convention Country
P.O.A.: general Has been filed in case	יפוי כח:יוגש בהמשך הוגש בעניין :			
ומסמכים בישראל Address for Service in MILLER-SIERADZKI ADV. & PAT. ATTR. P.O.Box 6145 HAIFA 31061 ISRAEL Our Ref.:	מען למסירת הודעות Israel מילר-שרצקי עו"ד ועו"פ ת.ד. 6145 חיפה 31061 שלנו :) ו/541/			
Applicant Signature חתימת המבקש מילר – שרצקי עורכי – דין ועורכי פטנטים		היום 15 בחודש 07 שנת 2002 This 15 of July 2002 לשימוש הלשכה For Office Use		

טופס זה, כשהוא מוטבע בחותם לשכת הפטנטים ומושלם במספר ובתאריך ההגשה, הינו אישור להגשת הבקשה שפרטיה רשומים לעיל.
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the Application, the
particulars of which are set out above.

Delete whatever is inapplicable*מחק את המיותר

מערכת ושיטה לקביעת תכונות חלל צינורי

SYSTEM AND METHOD FOR DETERMINING PROPERTIES OF A TABULAR CAVITY

SYSTEM AND METHOD FOR DETERMINING PROPERTIES OF A TUBULAR CAVITY

FIELD OF THE INVENTION

The present invention relates to determining properties of a tubular cavity

5 including the location of a device inserted into the cavity.

BACKGROUND OF THE INVENTION

In many fields there is a need to determine information about the cavity of tubular structures, such as blood vessels or pipelines. This information can include the thickness of the walls, the maximum and minimum internal diameters,

10 and the location of a device inserted into the cavity relative to the cavity.

In anatomy the cavities of such tubular organs. (for example veins and arteries) are called lumens. A typical prior art solution for analyzing lumen geometry and navigating within them has been to use ultasound. For example, in an ultrasound coronary investigation a full circle scan (2D) is used in order to

15 estimate the lumen size of a blood vessel. To achieve the estimate requires a large amount of computational power and involves sophisticated image processing schemes.

The present invention proposes a simple method for determining lumen properties by analyzing signals from a device placed inside the lumen.

20 In summary, it is a main object of the present invention to provide a method for analyzing signals from a device inside a tubular cavity to determine properties of the cavity including the location of the device.

The calculating power required for the present invention is significantly less that that required for conventional image processing methods,generally two

25 orders of magnitude less.

Still further objects and advantages will become apparent from a consideration of the ensuing description and drawings.

BRIEF DESCRIPTION OF THE INVENTION

There is thus provided, in accordance with a preferred embodiment of the

5   present invention, A computer based method for determining the distance of a transceiver located within a lumen from the center of the lumen and for determining the radius of the lumen, the lumen cross-section being substantially circular at the transceiver location, the method applied on data received from a transceiver placed at a position within the lumen that is

10   distance (r) from the center and distance (a) from the lumen wall, transmitting a signal of known velocity (v) that can be correlated with the time of flight and receiving a first signal and a second signal that are reflections of the transmitted signal, timing the time differences between the transmission of the transmitted signal and reception of the first (t1) and second (t2) reflection

15   signals, the method comprising:

    a. Calculating the distance of the transceiver from the center of the lumen = $(t1 - t2)v/4$;

    b. Calculating the diameter of the lumen = $(t1 + t2)v/2$;

20   ## BRIEF DESCRIPTION OF THE FIGURES

The invention is described herein, by way of example only, with reference to the accompanying Figures, in which like components are designated by like reference numerals.

FIG. 1   illustrates a model of the geometry of a lumen with a transceiver inside

25   it.

FIG. 2   illustrates a model of the geometry of a lumen with a transceiver inside
it taking into account angular reflections along the reflection direction

DETAILED DESCRIPTION OF THE INVENTION

The present invention proposes a simple method for determining lumen
5   properties by analyzing signals from a device placed inside the lumen. The
device is assumed to be a transducer and the signals are assumed to be
ultrasound. However the signals can be any signal that can be correlated with its
time of flight.

Ultrasound measurements consist of an emission of a sound at very high
10   frequency, listening to the echo, and analyzing the echo structure. Blood vessel
wall reflects ultrasound, thus enabling good distance measurement. Various
components of the blood system reflect ultrasound waves as well, but with
different efficiencies, i.e. intensities, noise, etc. The sum of those differences
provide information about the blood vessel and the lumen.

15   Ultrasound measurements comprise a simple procedure:

- Emission of a short pulse of acoustic energy

- Exact registration of the emission time

- "Listening" to echoes (multiple reflections)

- Electronic and mathematical signal manipulations

20   - Echo classification

- Distance (arrival time) estimates

- Display in terms of image and/or numbers.

Ultrasound is basically a pressure wave or wave packet and behaves
according to simple laws of optics. We do not refer here to nonlinear effects like
25   cavitations, frequency dispersion, etc.

Consequently, we can define our physical system as comprising a pulse source (ultrasound emitter), a nondispersive propagation medium, a cylindrical reflector and a receiver (ultrasound receiver). The reflector has two types of influence on the impinging waves:

5   - Reflection: like any other surface it reflects according to the geometry and impinging angles.

       - Spatial dispersion: some energy will be reflected around the reflection angle, thus a Lambertian element will be present in the reflection pattern. (A Lambertian reflector is characterized by reflection intensity
10   different from zero at angles other than reflection angle. The reflection pattern resembles a lobe shape oriented along the reflection direction. The more is the reflector Lambertian in nature, the more wide the pear shape will be. A perfect Lambertiam reflector reflects light with equal intensity at all angles disregarding the direction of the impinging light.)

15   The system has a cylindrical symmetry, hence a plane model will suffice.

       The mathematical equations are developed according to the following assumptions:

       - Ultrasound source is a point and has a constant angular radiation pattern.

20   - Ultrasound receiver is a point and has a constant angular sensitivity pattern.

       - Reflector is a circle with a perfectly reflecting mirrorlike surface.

       - There is no intensity attenuation

       The mathematical model is indeed very simple as only two algebraic
25   equations are used. The geometry of the model is shown in FIG.1. Lumen (circle) 10 has a radius (R). Transceiver 12 (comprising a transmitter and a receiver, both having no effective spatial extension) is located at a distance (a) from the lumen perimeter and at a distance (r) from the center.

Within the framework of the model, waves are reflected from a specular surface according to the laws of geometric optics. The reflecting surface has a circular shape. Waves emerging from the transmitter will bounce from the surface at equal angles with respect to the normal at the surface at the same point. Since normal lines at circle are passing through the center they are the same as diameters. Hence only reflections along the diameter passing through the transducer will reach the receiver. Hence, a receiver can detect only waves coming from the peripheral points located along the line connecting the circle center and the detector. This line intersects the circle at two points. Only waves from these points will be detected by the receiver.

One wave is reflected by the near side and is received at a time given by

$$t_1 = \frac{2 \cdot (R - r)}{v} \qquad (1)$$

where v is the sound velocity in the medium.

The second wave is reflected by the far side and is received at a time is given by

$$t_2 = \frac{2 \cdot (r + R)}{v} \qquad (2)$$

Solving the two equations one has the distance between the transducer (emitter and receiver) a and the reflector radius R as:

███████ (3)

███████ (4)

The two numbers given by equations (3) and (4) provide all the needed information:

r – the location of the transducer within the circle.

R – The circle radius

Thus, from a very simple measurement one can provide the "navigation" map in terms of path size and location on the path.

An assumption that can be discarded is the specular mirror nature of the reflector. A more realistic assumption is a surface that has some angular
5   reflections along the reflection direction, i.e. it is Lambertian to some extension. This can be taken into account using the model in FIG. 2. The equations (1) and (2) must be modified to:

$$r \cdot \cos\theta + a \cdot \cos\alpha = R \qquad (5)$$

$$r \cdot \sin\theta = a \cdot \sin\alpha \qquad (6)$$

10   After some simple calculations one finds:

$$a = \sqrt{R^2 + r^2 - 2 \cdot r \cdot R \cdot \cos\theta} \qquad (7)$$

Equation (7) reflects the simple fact that for a variation of the angle θ between 0 and 180°, a is monotonously increasing. The significance is crucial: The arrival time of every reflection is correlated to the reflection geometry. From
15   the point of view of the mirror model this means that all the reflections from other points not on the center-to-transducer line will reach the transducer at times between t_1 and t_2 in an ordered manner.

One should mention that a secondary reflection traveling twice the diameter can be detected. Time of flight is precisely four times the result in eq.
20   (4). The numerical result is independent of the transducer position inside the lumen.

If one assumes a narrow Lambertian distribution around the reflection angles, then only the small angles reflections will significantly contribue to the line widths.

25   Another factor to be taken into account is the optical distortion caused by large field of view in the case where the receiver and transmitter are not the same mathematical point). This effect will contribute to some line widening.

Calculated ultrasound signal shows clearly that the main contribution is connected to the line width.

It should be clear that the description of the embodiments and attached Figures set forth in this specification serves only for a better understanding of the invention, without limiting its scope.

It should also be clear that a person skilled in the art, after reading the present specification could make adjustments or amendments to the attached Figures and above described embodiments that would still be coveed by the scope of the present invention.

CLAIM

1. A method for determining the distance of a transceiver located within a lumen from the center of the lumen and for determining the radius of the lumen, the lumen cross-section being substantially circular at the transceiver

5   location, the method applied on data received from a transceiver placed at a position within the lumen that is distance (r) from the center and distance (a) from the lumen wall, transmitting a signal of known velocity (v) that can be correlated with the time of flight and receiving a first signal and a second signal that are reflections of the transmitted signal, timing the time differences

10 between the transmission of the transmitted signal and reception of the first ($t1$) and second ($t2$) reflection signals, the method comprising:

   c. Calculating the distance of the transceiver from the center of the lumen = $(t1 - t2)v/4$;

   d. Calculating the radius of the lumen = $(t1 + t2)v/4$;

15

for the applicant,

Doron Sieradzki
Advocate & Patent Attorney
Lic 17.035, Pat Att. 122
18 Mahanaim st. P.O.B. 6145, Haifa 31061, Israel
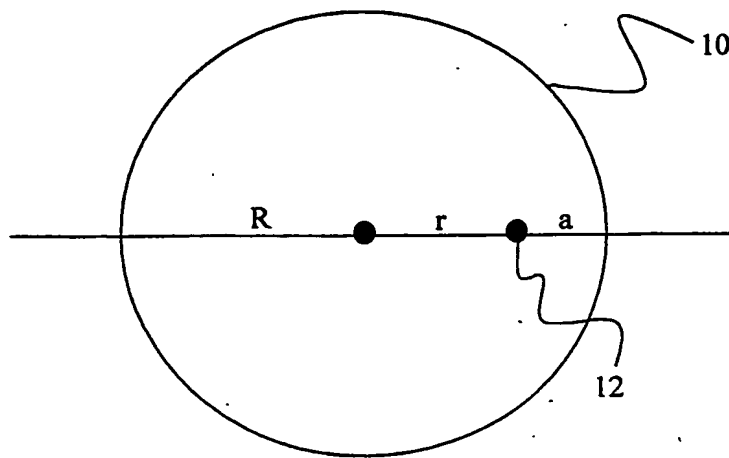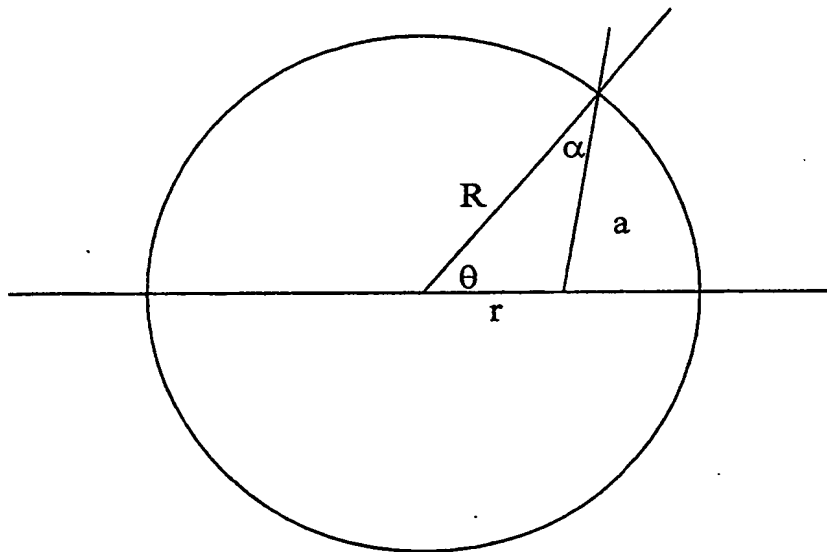Tel. 972-4-8386149. Fax. 972-4-8383548

FIG. 1

FIG. 2